SPEC SHEET





36x 15W RGBW Wash Light (25°)

The **B P9** is a powerful RGBW wash fixture in an angle of 25°. Every line can be controlled individually for effects or equal colouring of buildings/walls. Thanks to its very versatile bracket, you can suspend this fixture in every way possible; you can even make a line array of lights with them. They come with a special half diffuser system and a honeycomb for unique applications.

Physical

Dimensions (WxHxD)	512 x 275 x 244 mm
Packing dimensions (WxHxD)	575 x 370 x 395 mm
Nett weight	15,7 kg
Gross weight	17,7 kg

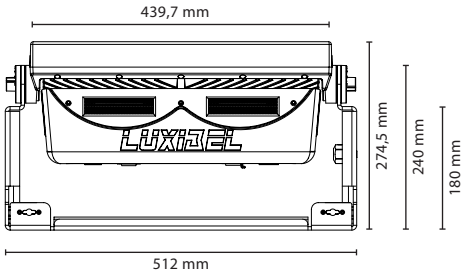



Mounting options

Hanging	2x Omega bracket with 2x 1/4 turn quick lock fastner
Standing	4x rubber feet
2nd suspension / safety wire	1x eye in the bottom of the bracket of the fixture to pass a safety wire or carabiner
Arrayable	Horizontal & vertical

Control


Menu control via 2,4" TFT display with 4 touch buttons		In/Link	XLR 5 pin
Control	DMX512, master/slave	DMX mode	2/4/16/21 channels
Dimmer mode	LED, halogen		

SPEC SHEET

Optical


Beam angle	25°
Light output RGBW	13100 lux @ 2m 3350 lux @ 4m 1532 lux @ 6m
Colours	RGBW
Control	In 4 segments of 9 LED horizontal
Strobe	0-20 Hz
Dimming curves	4

Photometrics Diagram

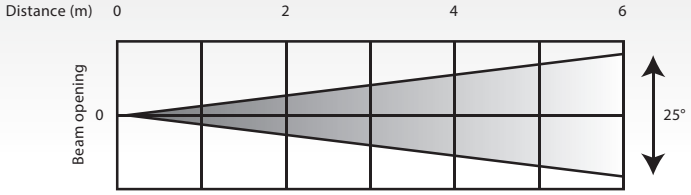

lux (RGBW)	13100	3350	1532
lux (R)	3207	785,6	332,4
lux (G)	5219	1343	598,2
lux (B)	731,7	187,2	83
lux (W)	5971	1612	716,2

Dimmer curve




Electrical

Fixture rated power	460W	Input power	100 - 240V ~ 50/60Hz - Auto switching power supply
LED engine	36x 15W RGBW	In/Link	PowerCON TRUE1 - max link current 10A
Refresh rate	3000 Hz		

Connectivity

1 TFT display & menu touch control buttons
2 DMX input
3 DMX output
4 Power input
5 Power output

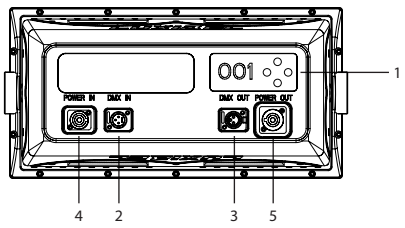

Accessories

Included

1x Powercable
1x Honeycombe
1x Half frost system
2x Omega bracket

Environmental

IP Rating	IP65
Cooling	Forced air cooling

SLS Sound Light Spain LIGHTING