


JUNIOR

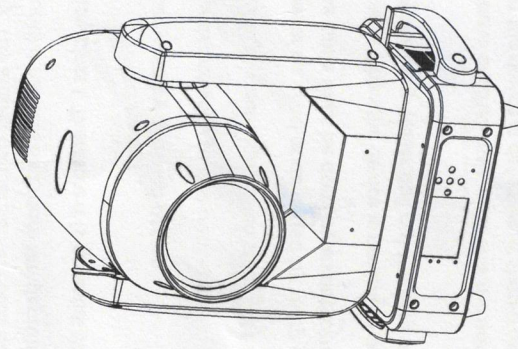

JNR LEDSPOT 400C
JNR-CS400

6 DMX CHANNELS

Channel 1	Channel 2	Function	value	Description
CH1	CH1	X-axis	0-255	0-540 degrees
CH2	CH2	X-axis fine tuning	0-255	0-2 degrees
CH3	CH3	Y axis	0-255	0-270 degrees
CH4	CH4	Y-axis fine tuning	0-255	0-1 degrees
CH5		XY Speed	0-255	From fast to slow
CH6	CH5	Dimming	0-255	0-100% dimming
			0-3	Turn off the light
			4-103	Pulse strobe from slow to fast
			104-107	Turn on light
			108-155	Gradual frequency conversion flash from slow to fast (gradual opening)
CH7	CH6	Stroboscopic	156-207	Frequency conversion flash from slow to fast (gradual off)
			208-212	Turn on light
			213-251	Random strobe from slow to fast
			252-255	Turn on light
			0-9	White light
			10-19	Color 1
			20-29	Color 2
			30-39	Color 3
			40-49	Color 4
			50-59	Color 5
			60-69	Color 6
			70-79	Color 7
			80-89	Color 8
			90-99	White Light + Color 1
			100-109	Color 1 + Color 2
			110-119	Color 2 + Color 3
			120-129	Color 3 + Color 4
			130-139	Color 4 + Color 5
			140-149	Color 5 + Color 6
			150-159	Color 6 + Color 7
			160-169	Color 7 + Color 8
			170-179	Color 8 + White Light
			180-215	Forward flow from fast to slow
			216-220	Stop
			221-255	Reverse flow from slow to fast
CH9	CH8	CMY1	0-255	Linear CMY blue
CH10	CH9	CMY2	0-255	Linear CMY red

.11.

CH11	CH10	CMY3	0-255	Linear CMY yellow
CH12	CH11	CTO	0-255	Linear CTO
			0-4	White light
			5-9	Pattern 1
			10-14	Pattern 2
			15-19	Pattern 3
			20-24	Pattern 4
			25-29	Pattern 5
			30-34	Pattern 6
			35-39	Pattern 7
			40-44	Pattern 8
			45-49	Pattern 9
			50-54	Pattern 10
			55-59	Pattern 11
			60-64	Great circle
			65-69	Dither Pattern 1 from Slow to Fast
			70-74	Slow to Fast Jitter Pattern 2
			75-79	Dither pattern from slow to fast 3
			80-84	Dither pattern from slow to fast 4
			85-89	Dither pattern from slow to fast 5
			90-94	Dither pattern from slow to fast 6
			95-99	Dither pattern from slow to fast 7
			100-104	Dither pattern from slow to fast 8
			105-109	Dither pattern from slow to fast 9
			110-114	Dither pattern 10 from slow to fast
			115-119	Dither pattern 11 from slow to fast
			120-127	Great circle
			128-190	Forward flow from fast to slow
			191-192	Stop
			193-255	Reverse flow from slow to fast
			0-9	White light
			10-19	Pattern 1
			20-29	Pattern 2
			30-39	Pattern 3
			40-49	Pattern 4
			50-59	Pattern 5
			60-69	Pattern 6
			70-79	Pattern 7
			80-89	Dither Pattern 1 from Slow to Fast
			90-99	Slow to Fast Jitter Pattern 2
			100-109	Dither pattern from slow to fast 3
			110-119	Dither pattern from slow to fast 4
			120-129	Dither pattern from slow to fast 5
			130-139	Dither pattern from slow to fast 6

.12.

CH14	CH13	Rotating pattern	140-149	Dither pattern from slow to fast 7
			150-200	Forward flow from fast to slow
			201-205	Stop
			206-255	Reverse flow from slow to fast
			0-127	0-400 degrees
CH15	CH14	Pattern rotation	128-190	Forward flow from fast to slow
			191-192	Stop
			193-255	Reverse flow from slow to fast
CH16		Rotation fine tuning	0-255	
CH17	CH15	Prism 1	0-127	Remove the prism
			128-255	Insert Prism 1
			0-127	0-400 degrees
CH18	CH16	Prism 1 rotation	128-187	Forward flow from fast to slow
			188-195	Stop
			196-255	Reverse flow from slow to fast
CH19	CH17	Prism 2	0-127	Remove the prism
			128-255	Insert Prism 2
			0-127	0-400 degrees
CH20	CH18	Prism 2 rotation	128-187	Forward flow from fast to slow
			188-195	Stop
			196-255	Reverse flow from slow to fast
CH21	CH19	Atomization	0-127	None
CH22		Empty	128-255	Atomization
CH23	CH20	Zoom in	0-255	From small to large
CH24	CH21	Focus	0-255	From far to near
CH25		Focus fine tuning	0-255	
CH26	CH22	Reset	210-215	Reset XY for more than 6 seconds
			220-235	Motor with reset effect over 6 seconds
			240-255	Reset all over 6 seconds