LUXIBEL

B PAR105RGBW

SPEC SHEET





***7x 15W RGBW 15° IP LED Par***

The **B Par105RGBW** is a small yet very powerful IP-65 rated Par with 7x 15 W LED engine in a 15° angle. It features high saturated colours, excellent colour mix and beautiful dimming. This fixture fits into a 30V Truss. This makes the B Par105RGBW one of the most powerful compact/small fanless RGBW LED pars on the AV-market.

## Physical

| | |
|---|---|
| Dimensions (WxHxD) | 219 x 225 x 113 mm |
| Packing dimensions (WxHxD) | 220 x 220 x 235 mm |
| Dimensions outer carton (4 pcs) (WxHxD) | 465 x 465 x 480 mm |
| Nett weight | 3,3 kg |
| Gross weight | 4,3 kg |




## Mounting options

| | |
|---|---|
| Hanging | 1x Omega bracket with 2x 1/4 turn quick lock fastner<br>1x M12 hole in the middle of the Omega bracket |
| Standing | Double bracket; adjustable opening angle |
| 2nd suspension / safety wire | 1x Moulded eye on the housing to pass a safety wire or carabinier |

## Control

| | | | |
|---|---|---|---|
| Menu control via TFT display with 4 buttons | | In/Link | XLR 5 pin |
| Control | DMX512, manual, master/slave | DMX mode | 4/6/8 channels |
| Dimmer mode | 0 - 100% - 8bit | | |

SLS Sound Light Spain LIGHTING

LUXIBEL


# BPAR105RGBW

SPEC SHEET


## Optical

| | |
|---|---|
| LED sources | 7x 15W |
| Beam angle | 15° |
| Light output RGBW | 11880 lux @ 2m<br>2910 lux @ 4m<br>1310 lux @ 6m |
| Strobe | 0 - 20Hz |
| Dimming curves | 4 |
| Colours | Red, Green, Blue + White<br>8 bit colour mix |

### Photometrics Diagram

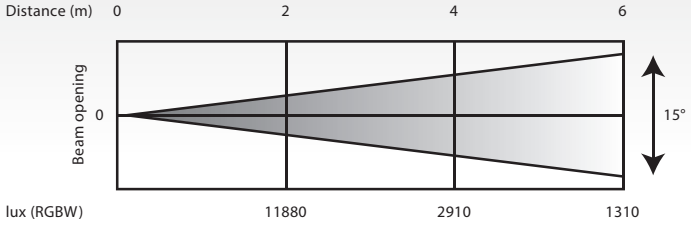


### Dimmer curve





## Electrical

| | | | |
|---|---|---|---|
| Fixture rated power | 95W | Input power | 100 - 240V ~ 50/60Hz - Auto switching power supply |
| LED engine | 7x 15W \| RGBW 4 in 1 | In/Link | PowerCON TRUE1 - max link current 10A |
| Refresh rate | >400 Hz | | |

## Connectivity

1 Power input
2 Power outut
3 DMX input
4 DMX output
5 Colour display

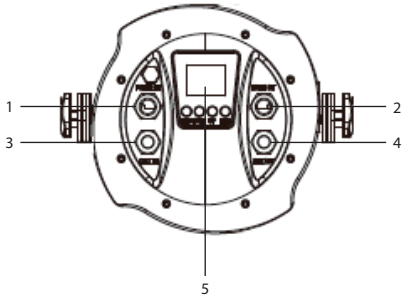


## Accessories

**Included**

1x Powercable
1x Omega bracket with 2x 1/4 turn quick-lock fastners

## Environmental

| | |
|---|---|
| IP Rating | IP65 |
| Cooling | Electronic heat control<br>No fans |

SLS Sound Light Spain LIGHTING