

JNR 150L BEAM

JNR-8108

The JNR 150L Beam adopts a 150W white LED lamp which features high brightness and stability. It is made of a new type of high temperature strength of engineering plastics and cast aluminum casing with nice outlook. The fixture is available independently controlled and linkable with each other for operation. And it is applicable for large-scale live performances, theater, studio, nightclubs and discos.


Specification

- Input Voltage: AC 90-260V 50/60Hz
- LED Quantities: 1 PC 150W white LED
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 13/11/15/15 DMX channels USITT DMX-512
- Power Consumption: 170W
- Dimensions: 298(D)*183(W)*417(H)mm
- Packing Dimensions: 370D)*270W)*500(H)mm
- Net Weight: 11kg
- Gross Weight: 13.6kg


WDMX | CE | LED | 0.2m | IP20 | Tc150°C | Ta40°C

Detail

- A 150W white LED lamp, 7500K
- 50,000 Hours lifespan and low power consumption
- 8/16 bit smooth and precise resolution for pan/tilt movement
- 360°/540°/630° pan and 90°/180°/270° tilt movement
- Pan/tilt inversion available
- Scan position memory, auto reposition after unexpected movement
- Specific high precision glass optic system with 2 ° projection angle
- Improved optics and flat beam field
- 1 Static gobo wheel with 17 gobos plus open
- 1 Color wheel with 14 colors plus open
- Variable direction rainbow effect with speed adjustable
- 2 Meter to infinite electric focus
- 8-facet prism with variable speed and direction
- 0-100% linear LED dimmer
- 25T/sec high speed LED shutter/strobe effect with variable speed
- Preset variable/random strobe and dimming pulse effect
- DMX512, master-slave, and sound activated controllable or auto operation
- 13/11/15/15 DMX channels USITT DMX-512
- DMX recorder and edit function integrated
- Blue LCD display
- Powercon connector IN/OUT
- 3-pin XLR connectors IN/OUT
- Fan cooling system
- Constant temperature readout and management function
- 45° max ambient temperature
- IP20
- 55dB at 3'dB rating
- 1*1/4 turn fastening omega clamp
- 1* safety attachment point

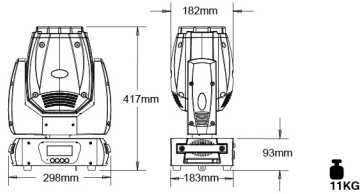

Light Output (FC=LUX × 0.0929)

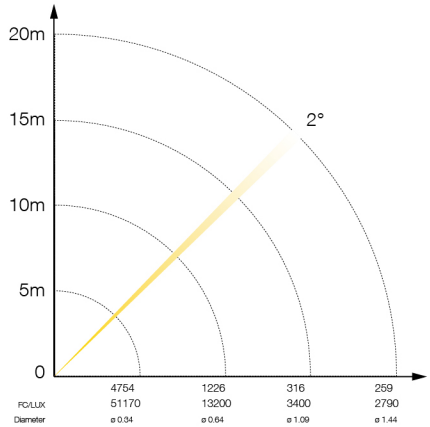

Static Gobos



Colors

