XR 200 Beam

Model: PR-2202

RoHS | CE | WDMX | 200W | 0.5m | IP20 | Tc150°C | Ta40°C


XR 200 Beam equipped with Platinum 5R lamp, moving beam light with an unprecedented brightness usually achievable only with far greater wattages. Weighing just 16kg, produces a perfectly parallel, laser-like beam with an incredible output of 57,417 lux at 20m. With its light weight and modest footprint, XR 200 Beam is small enough to be fitted anywhere-on trusses at live and TV events, on stage, in showrooms or conference rooms.


Beam, 200W





Scan with your Phone
to view more detail

Fixed gobos

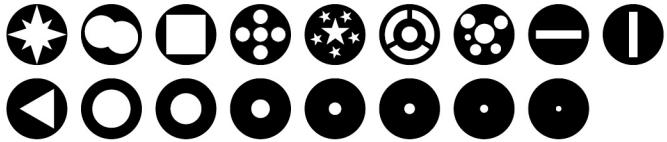







16Kg
Size(mm)

Specifications

- Input Voltages
  100-240V AC, 50/60Hz

- Power Consumption
  280W@220V

- Light Source
  PHILIPS MSD Platinum 5R 200W(8,000K, 2,000 hrs)

- Strobe
  Mechanical strobe, 0.3-20 F.P.S

- Dimmer
  0-100% linearly adjustable

- Colors
  1 Color wheel: 14 dichroic color filters plus open
  Variable speed and bi-directional rainbow effect
  Stepping/linear colour changing is available

- Gobos
  1 Fixed gobo wheel: 17 fixed gobos plus open
  Shaking and bi-directional wheel scrolling at variable speeds
  Gobo changing is available

- Effect
  One 8-facet prism+CTO+frost filter plus open
  Bi-directional with variable speeds

- Focus
  Motorized linear focus

- Head Movement
  Pan 540°, tilt 270° with auto position correction
  Swap and invert functions of pan and tilt

- Light Angle
  4°

- Control
  International DMX512, 3 pins and 5 pins interface
  Short mode 10 channels, standard mode 14 channels, extended mode 16 channels
  Self-test mode

- Other Functions
  Adjustable pan & tilt speed
  Fixture and lamp usage time display
  Modular construction for easy maintenance
  DMX512 wireless receiver(optional)
  DMX512 wireless transmitter(optional)

- Physical
  Housing: composite plastics, IP20
  Ambient temperature: maximum 40℃

- Weight
  Net weight: 16kg

- Packaging
  Standard: carton 575x455x495(mm)
  Optional: flight case 766x502x595(mm), 2 in 1

- Accessories
  G clamp, 2 pcs
  5 pins XLR connector, 1 set
  Safety cord, 1 pc
  Power cord, 1 pc
  Optional: Ω clamp, 2 pcs

Light Output

