AQUA 350 Beam

Model: PR-2368

RoHS | CE | WDMX | 350W | 1.2m | IP65 | Tc150°C | Ta40°C




Scan with your Phone
to view more detail

PR-2368 is 350W moving beam, a new member of AQUA family. It features PHILIPS 350W lamp, 6800K, an advanced optical system, IP65 rated producing a precise and tight 2.1° beam aperture ideal for outdoor searchlight and big air looks.


IP65, 350W, Beam

Fixed gobos

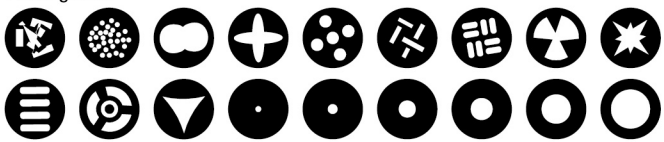

Rotating gobos(Ø12mm, image Ø6.0mm)



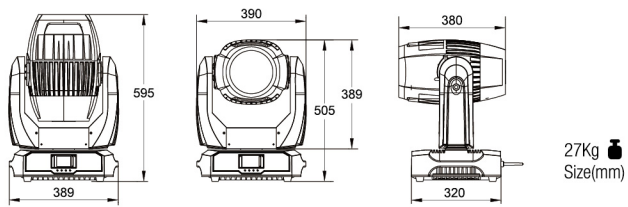

27Kg
Size(mm)

Specifications

- Input Voltages
  100-240V AC, 50/60Hz

- Power Consumption
  550W@220V

- Light Source
  PHILIPS 350W (6800K, 1,500 hrs)
  USHIO NSL-350A(optional)

- Strobe
  Mechanical strobe 0.3-20 F.P.S with macro

- Dimmer
  Mechanical dimmer 0-100% linearly adjustable

- Colors
  1 Color wheel: 12 dichroic color filters+CTO plus open
  Rainbow effect with bi-directional and variable speeds
  Stepping/linear color changing

- Gobos
  1 Fixed gobo wheel: 16 gobos plus open
  Bi-directionally rotatable, and shakable effect at variable speeds
  1 Rotating gobo wheel: 12 interchangeable gobos plus open
  Bi-directionally rotatable, and shakable at variable speeds

- Prism
  Three prisms (8-facet+16-facet+linear)+CTO+frost+open

- Focus
  Motorized linear focus

- Head Movement
  Pan 540°, tilt 270° with auto position correction

- Light Angle
  Beam angle: 2.1°

- Control
  International DMX512, 3 pins and 5 pins interface
  Short mode 15 channels, standard mode 19 channels
  Self-test mode
  User memory and preset memory

- Other Functions
  Adjustable pan & tilt speed
  LCD display screen
  Fixture and lamp usage time display
  Modular structure for easy maintenance
  DMX512 wireless receiver
  DMX512 wireless transmitter(optional)

- Physical
  Housing: cast aluminum and high temperature UV resistant ABS, IP65
  Ambient temperature: maximum 40℃

- Weight
  Net weight: 27Kg

- Packaging
  Standard: carton 515x480x690(mm)
  Optional: flight case 715x516x700(mm), 2 in 1

- Accessories
  G clamp, 2 pcs
  5 Pins XLR connector, 1 set
  Safety cord, 2 pcs
  Power cord, 1 pc
  Optional: Ω clamp, 2 pcs

Light Output

