AQUA 480 BWS

RoHS | CE | 3 PHASE | WDMX | 480W | 1.2m | IP65 | Tc150°C | Ta40°C

Model: PR-2497




Scan with your Phone
to view more detail

AQUA 480 BWS is PR new full featured IP65 moving light, which is designed to provide three features-Beam, Wash, Spot. It has adopted PR patented technology, combines advanced 480W lamp with superb optical system, 18 fixed gobos, 7 rotating gobos, CMY color mixing system, 3 independent prisms and 1 animation wheel. It is convenient and ideal for outdoor entertainment, concert, stadium and other lighting applications.


IP65, 480W, 3 in 1

Fixed gobos

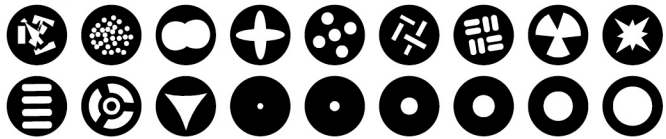

Rotating gobos(Ø22.5mm, image Ø9mm)



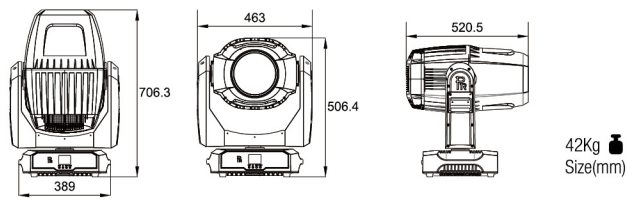

42Kg
Size(mm)

Specifications

- Input Voltages
  100-240V AC, 50/60Hz
- Power Consumption
  650W@220V
- Light Source
  USHIO PR 480(480W), (6900±300K, 1,500 hrs)
- Strobe
  Double shutter blades, 0.3-25 F.P.S
- Dimmer
  0-100% linearly dimming
- Colors
  CYM linear color mixing system with macros
  1 Color wheel: 11 dichroic color filters+CTO plus open
  Rainbow effect with bi-directional and variable speeds
  Stepping/linear color changing
- Gobos
  1 Fixed gobo wheel: 18 gobos plus open
  Bi-directionally rotatable, and shakable effect at variable speeds
  1 Rotating gobo wheel: 7 interchangeable gobos plus open
  Bi-directionally rotatable, and shakable at variable speeds
- CTO
  Independent 0-100% linear CTO
- Prism
  Three prisms(standard: 2x8-facet circular prisms and 1x4-facet linear prism)+frost+open, bi-directional rotation with variable speeds
  Optional: 3-facet, 16- facet circular/linear/gradient prisms
- Focus
  DMX linear focus
- Zoom
  DMX linear zoom
- Head Movement
  Pan 540°, tilt 270° with auto position correction
- Light Angle
  Beam mode: 0°~2.8°
  Spot mode: 2.8°~60°
  Wash mode: 10°~60°
- Control
  International DMX512, 3 pins and 5 pins interface
  Short mode 22 channels, standard mode 30 channels and extended mode 34 channels
  Self-test mode
- Other Functions
  Adjustable pan & tilt speed
  LCD display screen
  Fixture and lamp usage time display
  Modular structure for easy maintenance
  DMX512 wireless receiver
  DMX512 wireless transmitter(optional)
- Physical
  Housing: cast aluminum and high temperature UV resistant ABS, IP65
  Ambient temperature: maximum 40℃
- Weight
  Net weight: 42Kg
- Packaging
  Standard: carton 770x730x654(mm)
  Optional: flight case 595x540x650(mm)
- Accessories
  G clamp, 2 pcs
  5 Pins XLR connector, 1 set
  Safety cord, 1 pc
  Power cord, 1 pc
  Optional: Ω clamp, 2 pcs

Light Output(Spot/Beam mode, Wash mode)

