XLED 250 Spot

Model: PR-8111

RoHS | CE | LED | 0.5m | IP20 | Tc150°C | Ta40°C

The XLED 250 Spot is inheriting most of the advantages of XLED 336, has a fixed gobo wheel with 11 gobos which is for meeting the need of a LED light source with the spot function. The unit is designed for bar, club and so on.


COB, white LED



Scan with your Phone
to view more detail

Fixed gobos(image Ø15mm)



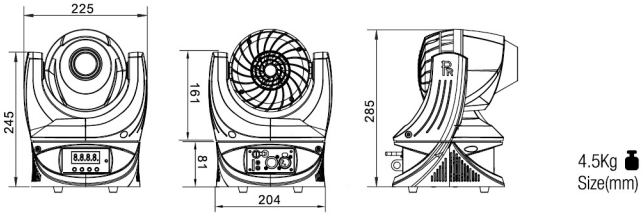

4.5Kg
Size(mm)

Specifications

- Input Voltages
  100-240V AC, 50/60Hz
- Power Consumption
  120W@220V
- Light Source
  COB-900MR-W(50W), white LED(9,500~12,000K), 50,000 hrs
- Strobe
  Electronic strobe, 0.3-20 F.P.S
- Dimmer
  0-100% linearly adjustable
- Colors
  1 Color wheel: 8 dichroic colors filters plus open
- Gobos
  1 Fixed gobo wheel: 11 gobos plus open
- Head Movement
  Pan 540º and tilt 190º with auto position correction
  Pan tilt swap and invert function
- Light Angle
  Beam angle (1/2 peak): 20°
- Control
  International DMX512, 5 pins interface
  Short mode 7 channels and standard mode 11 channels
  Master-slave mode, stand-alone mode
  Preset mode
- Other Functions
  Adjustable pan & tilt speed
  Fixture hours display, DMX channel number, software versions are displayed and display inversion
  Modular structure for easy maintenance
- Physical
  Housing: high temperature engineering-plastic, IP20

  Ambient working temperature: -20°C~40°C
- Weight
  Net weight: 4.5kg
- Packaging
  Standard: carton 405x295x300(mm)
  Optional: flight case 808x505x450(mm), 6 in 1
- Accessories
  G clamp, 1 pc
  5 pins XLR connector, 1 set
  Safety cord, 1 pc
  Optional: Ω clamp, 1 pc

Light Output

