XLED 2007 Beam

Model: PR-8123


RoHS | CE | WDMX | LED | 0.5m | IP20 | Tc150°C | Ta40°C

This mini unit succeeds all the advantages from the XLED 336 Beam. It features Dot-matrix control in the from of 2-2-2-1, touch key, sound operation. Additionally it is able to rotate endlessly.

RGBW, smart, 7x15W LED



Scan with your Phone
to view more detail

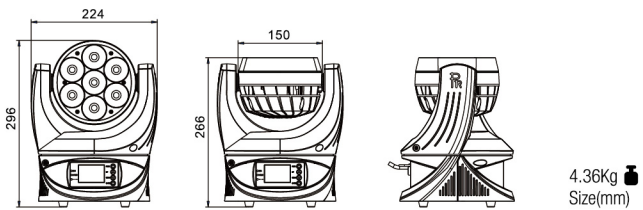

4.36Kg
Size(mm)

Specifications

- Input Voltages
  100-240V AC， 50/60Hz

- Power Consumption
  170W@220V

- Light Source
  OSRAM OSTAR 7x15W LEDs(RGBW, 4 in 1), 50,000 hrs

- Strobe
  Electronic strobe, 0-25 F.P.S

- Dimmer
  0-100% linearly adjustable

- Colors
  R/G/B/W and color mixing, with macros
  Linear color temperature correction from 2,700K to 10,000K

- Head Movement
  Pan 720°, or endless, tilt 270° or endless
  Pan tilt swap and invert function; auto-position correction

- Light Angle
  Beam angle(1/2 peak): 6°
  Field angle(1/10 peak): 12°

- Control
  International DMX512, 5 pins interface
  Standard mode 17 channels and extended mode 30 channels
  Master-slave mode, stand-alone mode, test mode
  Prset memory and user memory

- Other Functions
  Pixel control in the form of 2- 2-2-1
  Touch Key, LCD display, brightness and contrast adjustable
  Sound operation
  Adjustable pan & tilt speed
  Wireless control(optional)
  Firmware upgraded via DMX interface
  Fixture hours display, DMX channel number, software versions are displayed and display inversion
  Over temperature protection

- Physical
  Housing: high temperature engineering-plastic, IP20
  Ambient working temperature: -20°C~40°C

- Weight
  Net weight: 4.36kg

- Packaging
  Standard: carton 325x295x275(mm)
  Optional: flight case 1225x555x430(mm), 8 in 1

- Accessories
  G clamp, 1 pc
  5 pins XLR connector, 1 set
  Safety cord, 1 pc
  Optional: Ω clamp, 1 pc

Light Output

