XLED 6007

Model: PR-8128


RoHS | CE | WDMX | LED | 0.5m | IP20 | Tc150°C | Ta40°C

XLED 6007 is the answer for with tight 3.3 ° beams and a wide far-reaching quality wash in compact housing. It fixtures 7 pcs 60W RGBW LEDs with PR patented optics especially developed for a high output in any stage and the spectacular zoom range of 3.3° to 60° . For the next level, individual control of each LED pixel and attractive colorful chases provide "Kaleidoscope" effects both to look at and in the air.

Wash, pixel effect, LED



Scan with your Phone
to view more detail

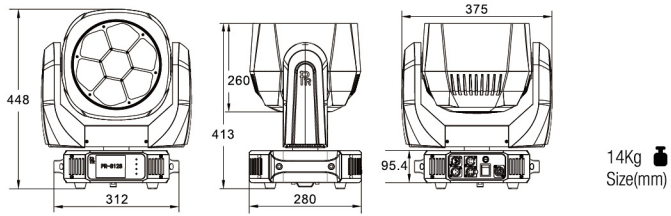

14Kg
Size(mm)

Specifications

- Input Voltages
  100-240V AC, 50/60Hz

- Power Consumption
  600W@220V

- Light Source
  OSRAM 7x60W LEDs(RGBW, 4 in 1), 2700K~10000K, 50,000 hrs

- Strobe
  Electronic strobe, 0-25 F.P.S(pulse strobe macros)

- Dimmer
  0-100% linearly adjustable

- Colors
  RGBW linear color mixing with macros

- Effect
  Rainbow, effect Modes(Kaleidoscope, swirl), multiple macros

- Head Movement
  Pan 540º, tilt 210º with auto position correction
  Pan tilt swap and invert function

- Light Angle
  Beam angle(1/2 peak) $\theta_{1/2}$: 3.3°~ 60°

- Control
  International DMX512, 3 pins and 5 pins interface
  Short mode 14 channels, standard mode 18 channels and extended mode 42 channels
  Master-slave mode, stand-alone mode, self-test mode

- Other Functions
  Ring control, pixel control, each color of RGBW of a LED lamp controllable
  Bi-directional and continual rotation of the front lens panel
  Color touch screen and its brightness adjustable
  Adjustable pan and tilt speed
  Wireless control(optional)
  Firmware upgraded via DMX interface and XLR cable
  Over temperature protection

- Physical
  Housing: high temperature engineering-plastic, IP20
  Ambient working temperature: -20°C~40°C

- Weight
  Net weight: 14kg

- Packaging
  Standard: carton 495x467x415(mm)
  Optional: flight case 980x580x620(mm), 2 in 1

- Accessories
  G clamp, 2 pcs
  5 pins XLR connector, 1 set
  Safety cord, 1 pc
  Power cord, 1 pc
  Optional: Ω clamp, 2 pcs

Light Output

