

JNR 90L SPOT

- JNR-8123

The JNR 90L spot features a 7500K 90W LED with high intensity and efficiency. It produces very high light output similar to a 120W spot, through a specific 11.9° optic system. The pan/tilt integrates in fast and quiet movement. It offers a full complement of professional characteristics, including a rotating gobo wheel (6 interchangeable gobos plus open), a color wheel (7 colors plus open), a 3-facet prism, motorized linear focus, 0-100% linear LED dimmer, variable speed shutter/strobe.

Specification


- Input Voltage: AC 90-260V 50/60Hz
- LED Quantities: 1 PC 90W white LED
- Control Signal: DMX512, master-slave and sound activated or auto operation
- Control Channel: 14/14/13 DMX channels USITT DMX-512
- Power Consumption: 160W
- Dimensions: 270(D)*149(W)*366(H)mm
- Packing Dimensions: 345(D)*240(W)*445(H)mm
- Net Weight: 6.70kg
- Gross Weight: 8.26kg


CE | LED | 0.2m | IP20 | T_c150°C | T_a40°C |

Detail

- A 90W white LED lamp
- 50,000 hrs lifespan and low power consumption
- 8/16 bit smooth and precise resolution for pan/tilt movement
- 360 ° / 540 ° / 630 ° pan and 90 ° / 180 ° / 270 ° tilt movement
- Scan position memory, auto reposition after unexpected movement
- Specific optic system with 11.9° projection angle
- Improved optics and flat beam field
- 1 Rotatable gobo wheel with 6 rotatable and interchangeable gobos plus open with speed adjustable, stream effect, dithering effect and rotatable clockwise or anticlockwise
- Gobo size 21.8mm (external dimensions)/14.5mm (inner dimensions)
- 1 Color wheel with 7 colors plus open
- Variable direction rainbow effect with speed adjustable
- 2 Meters to infinite electric focus
- 1 3-facet prism with variable speed and direction
- 0-100% linear LED dimmer
- 25T/sec high speed LED shutter/strobe effect with variable speed
- Preset variable/random strobe and dimming pulse effect
- DMX512, master-slave, and sound activated controllable or auto operation (7 built-in programs)
- 14/14/16 DMX channels USITT DMX-512
- DMX recorder and edit function integrated
- Red background LED display
- Powercon connector IN
- 3-pin XLR connectors IN/OUT
- Fan cooling system
- Constant temperature readout and management function
- 45°C max ambient temperature
- IP20
- 55dB at 3'dB rating
- 1*hanging kit

Light Output (FC=LUX × 0.0929)

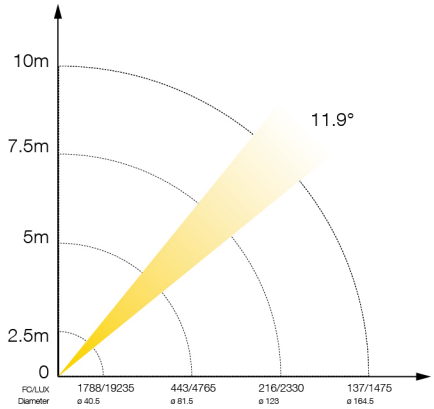

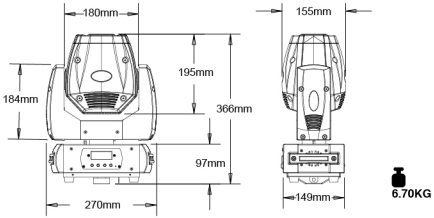

6.70KG

Colors



Gobos

