

www.pr-lighting.com
PR LIGHTING



August 2019



AQUA 580 BWS

Model: PR-2597



Key Features:

- PHILIPS MSD Platinum 25R (550W) , 7800K (optional: OSRAM SIRIUS HRI 550W XL)
- Power Consumption: 800W
- Beam mode: 2°, Spot mode: 1.8°~40°, Wash mode: 3°~50°
- Full CMY color mixing system with linear CTO color correction
- 1 Fixed gobo wheel with 18 gobos plus open, 1 rotating gobo wheel with 7 gobos plus open
- 1 Color wheel with 12 color filters plus open
- 4 Prisms: standard 8-facet + 9-facet + 4-facet+gradient prisms
- Frost: 1 frost filter
- DMX512 wireless receiver, RDM, Art-NET
- Modular structure for easy maintenance, ultra-quiet
- Net Weight: 36.5kg
- IP66



AQUA 580 BEAM

Model: PR-2569



Key Features:

- PHILIPS MSD Platinum 25R (550W) , 7800K (optional: OSRAM SIRIUS HRI 550W XL)
- Power Consumption: 800W
- Punchy Beam: 2°
- Full CMY color mixing system with linear CTO color correction
- 1 Fixed gobo wheel with 18 gobos plus open, 1 rotating gobo wheel with 7 gobos plus open
- 1 Color wheel with 11 color filters plus open
- 3 Prisms: standard 8-facet + 16-facet + 4-facet prisms
- DMX512 wireless receiver, RDM, Art-NET
- Modular structure for easy maintenance, ultra-quiet
- Net Weight: 36kg
- IP66

Detail



Moving heads

Detail





AQUA 480 BWS

Model: PR-2497



Key Features:

- USHIO PR 480(480W), (6900±300K,1500 hrs)
- Power Consumption: 650W
- Beam mode: 2.8°, Spot mode: 2.8°~60°, Wash mode: 10°~60°
- Full CMY color mixing system with linear CTO color correction
- 1 Fixed gobo wheel with 18 gobos plus open, 1 rotating gobo wheel with 7 gobos plus open
- 1 Color wheel with 12 color filters plus open
- 3 Prisms: standard 2 x 8-facet circular+ 4-facet linear prisms (optional: 3-facet, 16- facet circular/linear/gradient prisms)
- Frost: 1 frost filter
- 1 Graphic effect wheel, bi-directional rotation with variable
- DMX512 wireless receiver, RDM
- Modular structure for easy maintenance, ultra-quiet
- Net Weight: 42kg
- IP65

Detail



AQUA 480 BEAM

Model: PR-2469



Key Features:

- USHIO PR 480(480W), (7000±300K, 1500 hrs)
- Power Consumption: 650W
- Punchy Beam: 3.1°
- Full CMY color mixing system with linear CTO color correction
- 1 Fixed gobo wheel with 18 gobos plus open, 1 rotating gobo wheel with 7 gobos plus open
- 1 Color wheel with 11 color filters + 1 CTO plus open
- 2 Prisms: standard 8-facet + 16-facet prisms (optional: 3-facet, 16-facet, gradient and linear prisms)
- Frost: 1 frost filter
- DMX512 wireless receiver, RDM
- Modular structure for easy maintenance, ultra-quiet
- Net Weight: 45kg
- IP65

Detail



Moving heads



AQUA 350 BWS

Model: PR-2367



Key Features:

- USHIO NSL-350A(350W), (6800K,1500 hrs)
- Power Consumption: 550W
- Beam mode: 2.5°, Spot mode: 2.5°~42°, Wash mode: 5°~50°
- Full CMY color mixing system with linear CTO color correction
- 1 Fixed gobo wheel with 11 gobos plus open, 1 rotating gobo wheel with 12 gobos plus open
- 1 Color wheel with 12 color filters plus open
- 3 Prisms: 2 x 6-facet circular prisms + 1 linear prism + frost + open (optional: 3-facet, 16-facet and gradient prisms)
- DMX512 wireless receiver
- Modular structure for easy maintenance, ultra-quiet
- Net Weight: 27kg
- IP65

Detail



AQUA 350 Beam

Model: PR-2368A



Key Features:

- USHIO NSL-350A(350W), (6800K,1500 hrs)
- Power Consumption: 550W
- Punchy Beam: 2.1°
- 1 Fixed gobo wheel with 16 gobos plus open, 1 rotating gobo wheel with 12 gobos plus open
- 1 Color wheel with 12 color filters + 1 CTO plus open
- 3 Prisms: 8-facet + 16-facet prisms + linear prism + CTO+ frost + open (optional: 3-facet, 16-facet prism or gradient prism)
- DMX512 wireless receiver
- Modular structure for easy maintenance, ultra-quiet
- Net Weight: 30kg
- IP65

Detail



Moving heads



AQUA LED 1500 Spot

Model: PR-8178

Key Features:

- Atria HL620-A, 620W (8,000±500K), > 20,000 hrs
- Power Consumption: 930W
- Light Angle: 8°~56°
- Full CMY color mixing system with linear CTO color correction
- 2 Rotating gobo wheels: each with 6 gobos plus open
- 1 Color wheel with 6 color filters plus open
- Prism: 1 x 4-facet prism
- 1 Interchangeable graphic effect wheel, bi-directional rotation with variable speeds
- DMX512 wireless receiver
- Modular structure for easy maintenance, ultra-quiet
- Net Weight: 55kg
- IP65



AQUA LED 1700 Framing

Model: PR-8179

Key Features:

- Atria SSL730, 730W (8,000K), 20,000 hrs
- Power Consumption: 1100W
- Light Angle: 7°~ 60°
- Full CMY color mixing system with linear CTO color correction
- 1 Fixed gobo wheel with 7 gobos plus open, 1 rotating gobo wheel with 6 gobos plus open
- 1 Color wheel with 6 color filters + 1 CTO plus open (optional: 5 interchangeable color filters + 1 high CRI filter plus open)
- Prism: 1 x 4-facet prism
- 1 Interchangeable graphic effect wheel, bi-directional rotation with variable speeds
- DMX512 wireless receiver, RDM, Art-NET
- Modular structure for easy maintenance, ultra-quiet
- Net Weight: 57kg
- IP65

Detail




Detail



DATA TABLE

	AQUA 580 BWS	AQUA 580 Beam	AQUA 480 BWS	AQUA 480 Beam	AQUA 350 BWS	AQUA 350 Beam	AQUA LED 1500 Spot	AQUA LED 1700 Framing
Model	PR-2597	PR-2569	PR-2497	PR-2469	PR-2367	PR-2368A	PR-8178	PR-8179
Light source	PHILIPS MSD Platinum 25R (650W) optional: OSRAM SIRIUS HR 650W XL	PHILIPS MSD Platinum 25R (650W) optional: OSRAM SIRIUS HR 650W XL	USHIO PR480, 480W 6900±300K, 1500 hrs	USHIO PR480, 480W 7000±300K, 1500 hrs	USHIO NSL-350A, 350W 6800K, 1500 hrs	USHIO NSL-350A, 350W 6800K, 1500 hrs	Atra HL620-A, 620W 8,000±500K, >20,000 hrs	Atra SSL730, 730W 8000K, 20000 hrs
Power consumption	800W@220V	800W@220V	650W@220V	650W@220V	550W@220V	550W@220V	930W@230V	1100W@230V
Input voltage	100V~240V AC, 50/60Hz	100V~240V AC, 50/60Hz	100V~240V AC, 50/60Hz	100V~240V AC, 50/60Hz	100V~240V AC, 50/60Hz	100V~240V AC, 50/60Hz	90V~240V AC, 50/60Hz	100V~240V AC, 50/60Hz
Light angle	2°, 2°~40°, 3°~50°	2°	2.8°, 2.8°~60°, 10°~60°	3.1°	2.5°, 2.5°~42°, 5°~50°	2.1°	8°~56°	7°~60°
CMY	Linear	Linear	Linear	Linear	Linear	N/A	Linear	Linear
CTO	Linear	Linear	Linear	Linear	Linear	Linear	Linear	Linear
Color wheel	12 + open	11 + open	11 + CTO + open	11 + CTO + open	12 + CTO + open	12 + CTO + open	6 + open	6 + open
Fixed gobo wheel	18 + open	18 + open	18 + open	18 + open	11 + animation effect + open	16 + open	N/A	7 + open
Rotating gobo wheel	7 + open	7 + open	7 + open	7 + open	12 + open	12 + open	2x(6 + open)	6 + open
Prism	8-facet+9-facet+4-facet+gradient	8-facet+16-facet+4-facet	2x8-facet+4-facet	8-facet+16-facet	2x8-facet+4-facet	8-facet+16-facet+linear	4-facet	4-facet
Frost	Linear frost	Linear frost	Together with prism	Linear frost	Together with prism	Together with prism	Linear frost	Linear frost
Iris	N/A	N/A	N/A	N/A	N/A	N/A	5~100%	5~100%
Focus	Motorized	Motorized	Motorized	Motorized	Motorized	Motorized	Motorized	Motorized
Zoom	Motorized	N/A	Motorized	N/A	Motorized	N/A	Motorized	N/A
Strobe	0.3~25 F.P.S	0.3~25 F.P.S	0.3~25 F.P.S	0.3~25 F.P.S	0.3~20 F.P.S	0.3~20 F.P.S	0.3~25 F.P.S	0.3~20 F.P.S
Control protocol	DMX512/Wireless/RDM/Art-Net	DMX512/Wireless/RDM/Art-Net	DMX512/Wireless/RDM	DMX512/Wireless/RDM	DMX512/Wireless/RDM	DMX512/Wireless/RDM	DMX512/Wireless/RDM/Art-Net	DMX512/Wireless/RDM/Art-Net
DMX channels	23/31/35	19/26/29	22/30/34	19/26/29	20/26/31	16/20/21	23/31/35	23/31/35
Pan/Tilt	540°/270°	540°/270°	540°/270°	540°/270°	540°/270°	540°/270°	540°/270°	540°/270°
Net weight	36.5Kg	38Kg	42Kg	45Kg	27Kg	30Kg	55Kg	57Kg
IP Rated	IP66	IP66	IP65	IP65	IP65	IP65	IP65	IP65
Other	Effect wheel	N/A	N/A	N/A	N/A	N/A	Effect wheel	Framing Module

AQUA 480 Beam
AQUA LED 1500 Spot

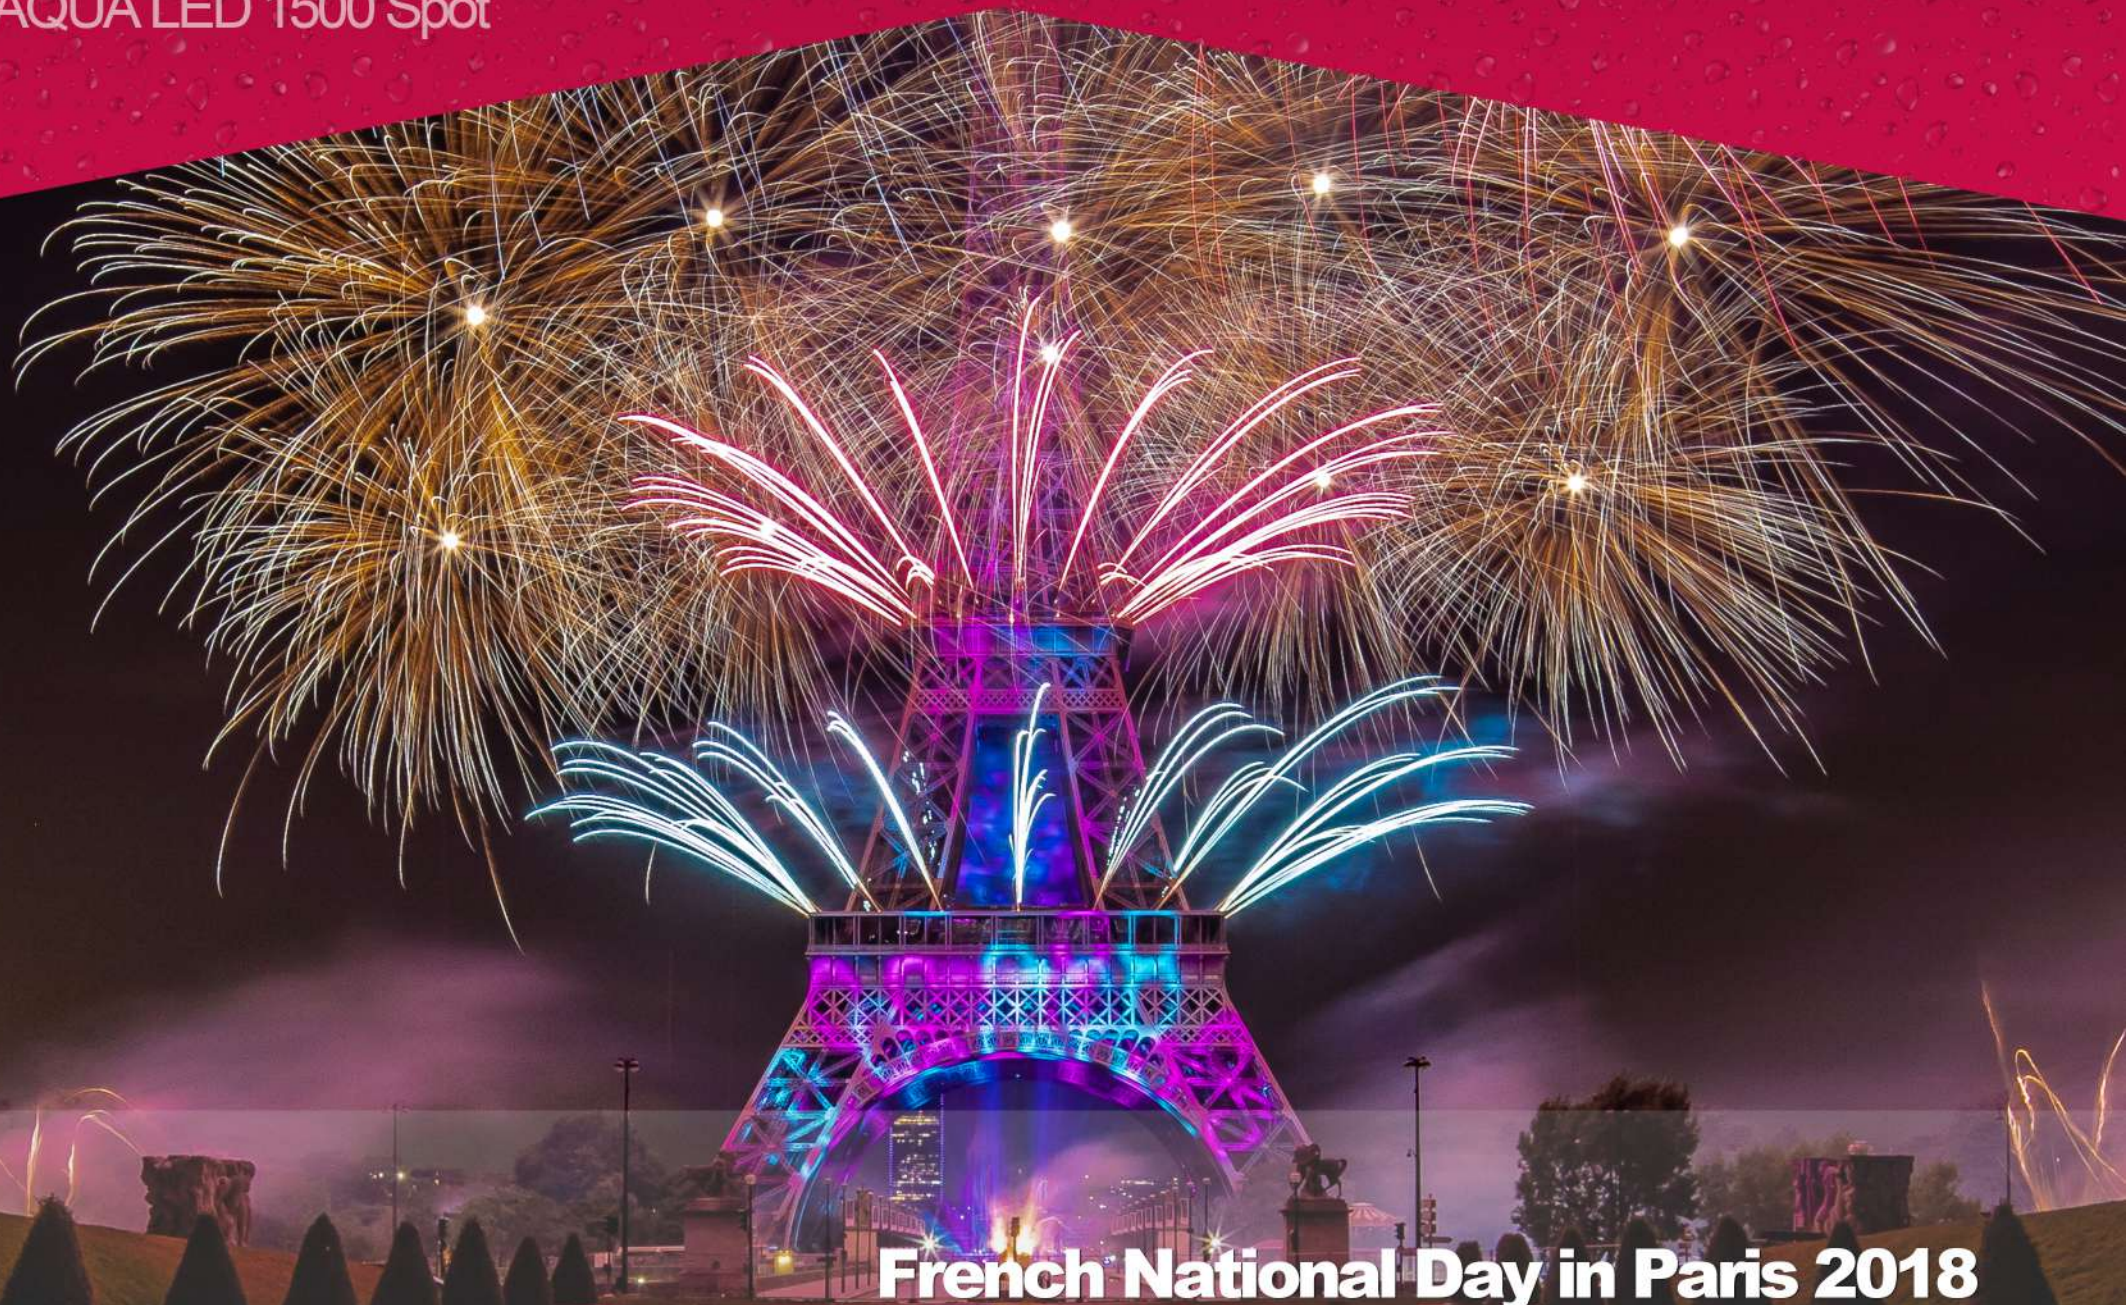

French National Day in Paris 2018

AQUA 480 Beam



China's Tallest Building - 632-metre Shanghai Tower

AQUA 480 BWS



Grozny Dolphinarium



Ctra. de Mollet a Sabadell - km 4,3 Nave 12 -
Pol. Ind. Can Vinyals Sta. Perpetua de la Mogoda 08130

+34 935 44 86 91

Comercial@soundlightspain.com